CHANGDA
MACHINE

昌达机械 值得信赖

台州市昌达机械厂
TAIZHOU CITY CHANGDA MACHINE FACTORY
地址:中国浙江省台州市椒江区洪西路工业园区52-7号　邮编:318015
ADD: No.52-7, Hongxi Road Industrial Zone, Jiaojiang District,
Taizhou City, Zhejiang Province, China　P.C: 318015
电话/Tel:+86-576-88013498　88673733
传真/Fax:+86-576-88010078
手机/M.B:+86-13905768561
Http://zjchangda.cn.alibaba.com
Http://www.zjcd.com
E-mail:info@zjcd.com　sale@zjcd.com

昌达机械
CHANGDA MACHINE

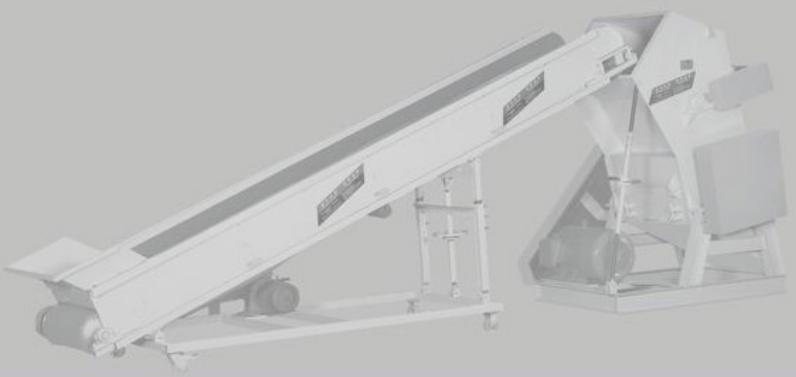

台州市昌达机械厂
TAIZHOU CITY CHANGDA MACHINE FACTORY

昌达机械
CHANGDA MACHINE
Http://www.zjcd.com

台州市昌达机械厂

昌达机械 值得信赖

追求品质
永无止境

企业简介

台州市昌达机械厂是专业生产塑料机械设备的厂家，本厂创建于1988年，在本厂几十年的发展历程中，昌达凭先进的企业管理体制，雄厚的设备基础和强大的技术开发力量，不断地吸收新的工艺、新的技术，使本厂的产品质量和性能始终处于领先地位。

通过几十年的坎坷历程和奋斗，本厂已形成二大系列塑料机械产品，即挤出机系列，粉碎机系列。我们将一如既往地以雄厚的技术力量、优质产品性能、合理的价格及周到、快捷的服务。作为我们不懈进取的原则，赢得广大新老客户的信赖。从昨天到今天直到未来，昌达人愿与您真诚合作，为中国塑料行业的发展尽绵薄之力。

BRIEF INTRODUCTION

Taizhou city Changda Machine Factory, which is established in 1988, is specialized in producing plastic machine equipment. With the development of several decades and sucking in new technique and craftwork. continuously, Changda, which based on its advanced enterprise management system, powerful equipment foundation and strong technology development force, always makes the products quality and performance be on top.

Through the rough course and struggle of several decades, Changda has formed two series of plastic machine products-plastic extruder and plastic crusher series. We take powerful technique force, high-quality performance, reasonable price and thoughtful fast service as the principle of our enterprise all along, therefore we can win the trust of numerous old and new customer home and abroad. From yesterday to today, until to the future, Changda are looking forward to cooperate with you sincerely and contribute our effort to the plastic industry of China.

昌达机械
CHANGDA MACHINE
Http://www.zjcd.com

塑料瓶回收专用破碎机
Plastic Bottle Recycling Crusher.

FS650B-3 FSB800B-3
FS1000B-3 FS1200B-3

主要特点：

吸取国内外同行的先进技术，采取强压装置。使中空产品在压扁的形状下进行粉碎。不因产品跳动而影响破碎产量，从而有效地提高了破碎能力。另外，配用自动输送装置，减少劳动强度，提高工作效益。是目前国内外比较先进的专粉PET（可乐瓶）的一种粉碎设备。

Main Features:

Learn the advanced technology from colleagues home and abroad and take force feeder device for the crusher that can crush the hollow plastic products without being squashed. This device do not affect the crushing output for bottle jumping inside machine, but improve the crushing capacity. In addition, mounting auto conveyor device which can reduce man power and improve work efficiency. So it is the advanced and special crushing equipment for PET at home and abroad.

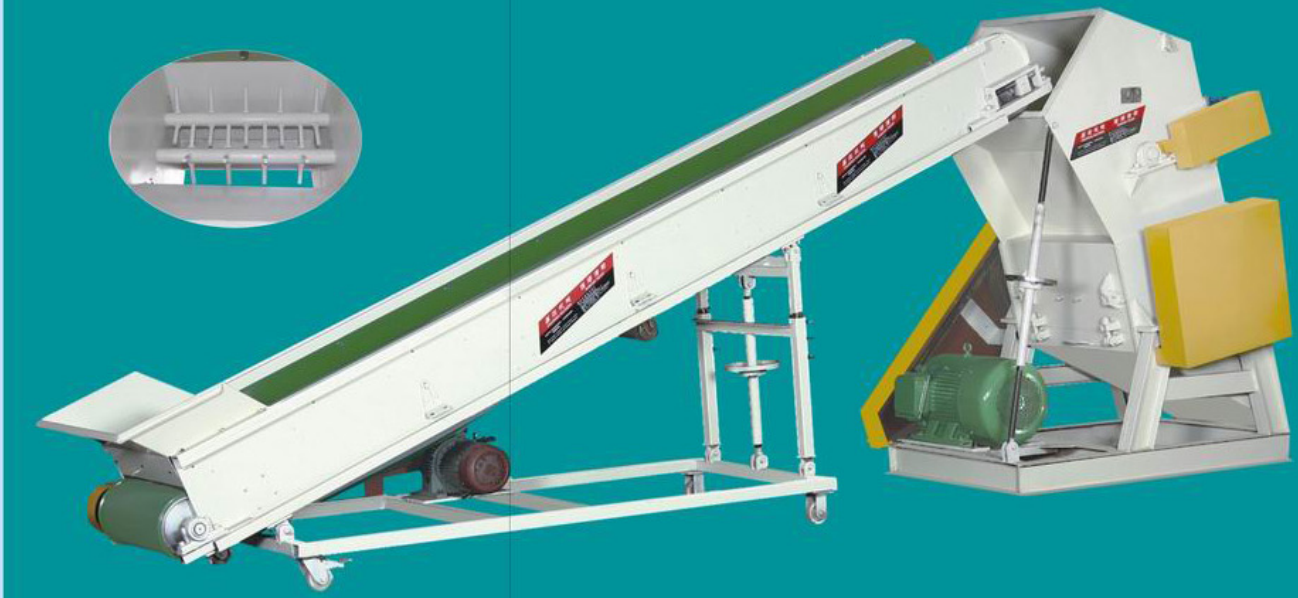

参数/Data 型号/Model	旋转刀片 Rotating knife (把/pcs)	固定刀片 Fixed knife (把/pcs)	筛网孔径 Screen aperture (mm)	有效口径 Valid caliber (mm)	破碎能力 Crushing output (Kg/h)	配套动力 Driving power (Kw)		外形尺寸 Out line demension (mm)	整机重量 Machine weight (Kg)
FS650B-3	6	4	◆20	800x580	700-1000	22	1.5	1750x1350x2000	1500
FS800B-3	6	4	◆20	810x580	1000-1300	30	1.5	1880x1530x2250	2000
FS1000B-3	6	4	◆20	1010x650	1500-1800	37	1.5	2450x1760x2500	2800
FS1200B-3	6	4	◆20	1210x660	1800-2200	45	1.5	2450x2000x2500	3200

昌达机械
CHANGDA MACHINE
Http://www.zjcd.com

橡塑破碎机
Rubber & plastic crusher

FS1000B-3 FS1200B-3

主要特点：

投料方便，可以较好地破碎比较大的中空成型物料。比如：矿泉水瓶，塑料盆，塑料电视机壳，汽车保险杠，洗衣机壳等，无须压扁便可直接投入破碎。

Main Features:

It is convenient to feed raw material and can better crush hollow plastic products such as mineral water bottle, plastic basin, plastic TV shell, car buffer bar, washing machine shell etc. It can be crushed directly without being squashed.

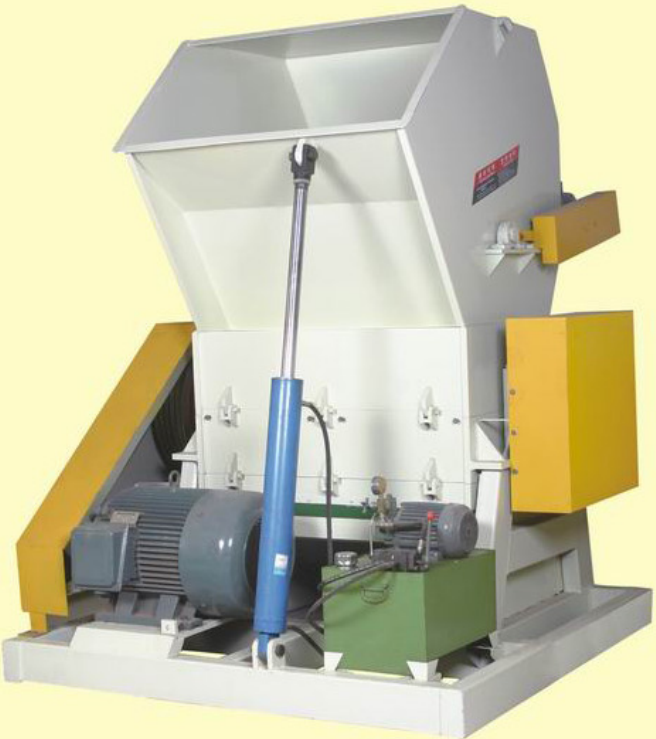

参数/Data 型号/Model	旋转刀片 Rotating knife (把/pcs)	固定刀片 Fixed knife (把/pcs)	筛网孔径 Screen aperture (mm)	有效口径 Valid caliber (mm)	破碎能力 Crushing output (Kg/h)	配套动力 Driving power (Kw)	外形尺寸 Out line demension (mm)	整机重量 Machine weight (Kg)
FS800B-1	6	4	◆12-22	810x500	700-1200	22/30	2400x1700x2200	1700
FS1000B-1	6	4	◆12-22	1010x550	1000-1400	37/30	2450x1760x2500	2500
FS1200B-1	6	4	◆12-22	1210x600	1300-1500	45/55	2450x2000x2500	3000

昌达机械
CHANGDA MACHINE
Http://www.zjcd.com

大中型破碎机
Large and medium crusher

FS400B-1 FS500B-1
FS650B-1

主要特点:

刀轴形状为八字型，对薄壁中空塑料制品有很强抓着力，刀片安装为背靠式，具有很强的切削力。

适用范围:

对各种中空的薄壁瓶类有很好的破碎效果，可加载自动进料装置和自动输料灌装系统，生产率高。

Main Features:

Splay cutter shaft has a large grab force for hollow thin-walled plastic products. The installment model of the cutter blade is back-to-back, so it has a large cutting force.

Scope of application:

It has a good crushing effect for various thin-walled bottles and can equip auto loading and unloading material and silo device so the production efficiency is high.

FS400B-1 —FS650B-1

FS300A — FS650A

参数/Data 型号/Model	旋转刀片 Rotating knife (把/pcs)	固定刀片 Fixed knife (把/pcs)	筛网孔径 Screen aperture (mm)	有效口径 Valid caliber (mm)	破碎能力 Crushing output (Kg/h)	电机功率 Electric motor power (Kw)	外形尺寸 Out line demension (mm)	整机重量 Machine weight (Kg)
FS400B-1	6	4	◆8-22	320x410	200-350	7.5	1600x1400x1300	420
FS500B-1	6	4	◆8-22	320x510	300-510	11	1700x1500x1400	650
FS650B-1	6	4	◆8-22	400x650	350-650	15	1800x1600x1500	900
FS300A	3	2	◆6-22	310x260	100-250	4	700x700x1400	260
FS400A	3	2	◆8-22	400x320	200-350	7.5	800x800x1600	420
FS500A	3	2	◆8-22	500x340	300-800	11	1400x1100x1700	650
FS650A	3	2	◆8-22	650x360	500-1000	15	1600x1400x1800	900

强力块料型破碎机
Force block material crusher
FS550C FS600C

主要特点:

刀轴采用整体焊接成形，耐冲击，旋转刀安装为内镶式，错位分段有极强的抗震性，刀具为高度强合金工具钢坚实耐用。

适用范围:

各种回收熔结块料，机头料，(塑料)原坯料，各种工程塑料等大型块料。

Main features:

Integral welding shaping is adopted for cutter shaft so it has good impact resistance performance. The installment model of the rotating cuter is inside inlay and offset segmentation so it has excellent shake-proof performance. The cutter is made of alloy tool steel with high strength and it is durable.

Scope of application:

Such massive materials as various clinker recycling material, ram head material, (plastic)raw blank material, engineering plastic material and so on.

参数/Data 型号/Model	旋转刀片 Rotating knife (把/pcs)	固定刀片 Fixed knife (把/pcs)	最大块料 the maximum lump material (kg)	有效口径 Valid caliber (mm)	破碎能力 Crushing output (Kg/h)	电机功率 Electric motor power (Kw)	外形尺寸 Out line demension (mm)	整机重量 Machine weight (Kg)
FS550C	10	2	10	660x340	550-800	37	2100x1100x2000	3000
FS600C	12	2	20	710x350	750-1200	45	2200x1300x2200	5500

昌达机械
CHANGDA MACHINE
Http://www.zjcd.com

薄膜、纺织袋专用粉碎机
Film, Weaves Special Grinder

FS500B-2 FS650B-2
FS800B-2

主要特点:

本机采用空心轴结构，清洗干净、粉碎效率好、出料快

Main features:

The hollow shaft structure is adopted for this model so it can wash clean, good efficiency in crushing and high speed discharging material.

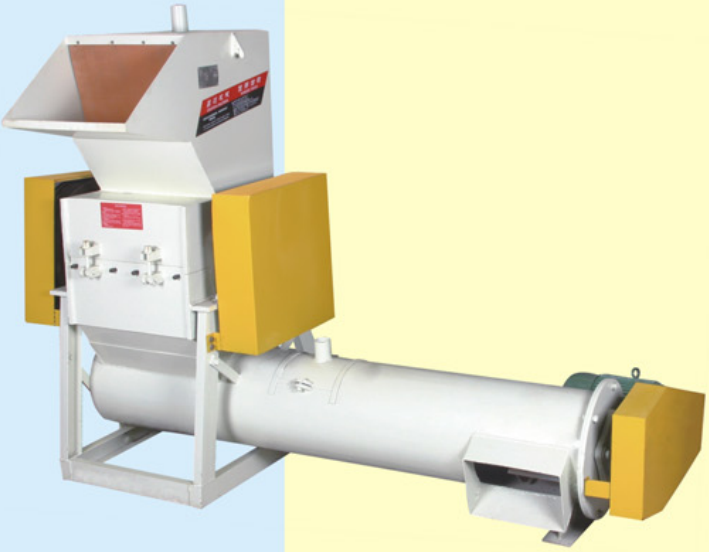

参数/Data 型号/Model	旋转刀片 Revolving knife (把/pcs)	固定刀片 Fixed knife (把/pcs)	筛网孔径 Scren aperture (mm)	有效口径 Valid caliber (mm)	破碎能力 Distintegrating ability (Kg/h)	电机功率 Electric motor power (Kw)		外形尺寸 Out line demension (mm)	整机重量 Machine weight (Kg)
FS500B-2	6	4	◆50-90	510x350	700-1500	18.5	5.5	2200x1800x1600	1000
FS650B-2	6	4	◆50-90	660x350	1000-2000	22	7.5	3200x1900x1700	1600
FS800B-2	6	4	◆50-90	810x400	1500-2500	30	7.5	3200x2000x1800	2400

低噪音强力破碎机
Low noise STRONG GRANULATORS

主要特点

- ▲ 重负荷轴承、大质量惯轮设计、粉碎力强。
- ▲ 易拆式设计，清理容易、维护方便。
- ▲ 双层隔音料斗，防止噪音。
- ▲ 优质高速钢刀具，刀刃锋利、持久耐用。
- ▲ 电源连锁保护，确保操作安全。

Main features:

- ▲ Heavy-duty bearings, large inertial wheel and strong crushing ability.
- ▲ Easy-disassembly design, simple and easy to clean and maintain.
- ▲ Two-layer sound-insulated hopper to insulate noise.
- ▲ High-speed quality crtter, sharp edge, durable in operation.
- ▲ Interlock power protection to ensure operational safety.

技术参数/ SPECIFICATIONS

参数/Data 型号/Model	回转刀数 Rotary cutter	固定刀数 Stationary cutter	粉碎口径 Crushing size (mm)	破碎能力 Distintegrating ability (Kg/h)	电机功率 Electric motor power (Kw)	外形尺寸 Out line demension (mm)	整机重量 Machine weight (Kg)
FS5.5	3/15PCS	2PCS	250x210	150-300	5.5	950x630x1100	290
FS7.5	9/15PCS	2PCS	300x210	160-320	7.5	1000x700x1260	330
FS11	6/18PCS	2PCS	380x250	180-360	11	1080x820x1330	520
FS15	6/24PCS	2PCS	500x250	200-550	15	930x1280x1400	750
FS22	6/21PCS	2PCS	500x320	360-720	22	1700x1350x1760	1000
FS30	6/27PCS	2PCS	630x320	600-1200	30	1700x1480x1760	1250
FS37	6/27PCS	2PCS	700x480	800-1600	37	2000x1600x2000	1600

昌达机械
CHANGDA MACHINE
Http://www.zjcd.com

主要特点

- ▲ 适用面广，可集中破碎、回收各种材质、形状的塑料制品。
- ▲ 加工工艺成熟，箱体、刀架等重要部件采用整体加工，确保配合精度。
- ▲ 结构合理，操作方便，省电耐用，高效经济。
- ▲ 设有多项安全保护装置，确保操作安全。
- ▲ 投料斗双层设计，减少噪音。

Main features

- ▲ Tailored to meet a wide variety of requirements, able to granulate & recycle all kinds of plastics material of different texture and shapes.
- ▲ Well constructed with unique mechanical parts to ensure precision.
- ▲ Strong structure, easy to operate, low electricity consumption & durable.
- ▲ Full safety device installed, to ensure safe operation.
- ▲ Double wall hopper designed, low noise.

低噪音强力破碎机
Low noise STRONG GRANULATORS



结构简图(参考)
STRUCTURE DIAGRAM(FOR REFERENCE)



低噪音片型破碎机
Low noise Flake cutter



刀架、刀片
Cutter saddle\cutter



筛网Screen netting
筛网之孔径决定破碎颗粒大小，可根据客户要求订做。
Customized screen mesh available

技术参数 / SPECIFICATIONS

型号 Model	WS230	WS300	WS400	WS500	WS600	WS800
粉碎口径/Crushing chamber(mm)	230x200	310x200	410x235	510x290	610x320	815x470
粉碎能力/Crushing ability(kg/h)	100 - 150	150 - 200	200 - 250	300 - 350	350 - 450	450 - 600
固定刀/Stationary cutter	2	2	2	2	4	4
旋转刀/Rotary cutter	6	9	12	15	18	24
功率/Power(kw)	4	5.5	7.5	11	15	22\30
外形尺寸/Dimensions(LxWxH cm)	95x60x119	100x72x129	103x84x139	123x101x163	132x111x183	173x149x230
净重/Net Weight(kg)	290	435	500	900	970	2000

主要特点

- ▲ 片型刀结构介于爪刀、平刀之间，适合破碎普通片材、管材、型材、板材及包装材料等塑料制品、浇道口。
- ▲ 通用型塑料粉碎机，采用密封轴承，使轴承转动长时间保持良好；刀型设计合理，产品成粒均匀；刀座热缩处理，外型设计美观大方。

Main Features

- ▲ Flake cutter blade is in between claw and flat cutter blade. Suitable for recycle and restore of conventional sheets, tube plastics, profiles. Packing plastics, extrusion mould products & runners.
- ▲ General operation adopted with airtight sealed bearing to allow long hours rotation; well designed cutter blades, to ensure the balance of pellets sizes after crushed; cutter base with special heat treat mens, elegant in appearance.

片型刀架
Flake cutter saddle

昌达机械
CHANGDA MACHINE
Http://www.zjcd.com

主要特点

- ▲ 可与任意型号破碎机搭配使用。
- ▲ 经破碎机破碎过的碎料自动挥手，无需人工参与。
- ▲ 原料所接触部分皆为不锈钢（或胶管）材料制作，保持原料精纯。
- ▲ 配置集尘装置，吸收粉尘，防止空气污染。
- ▲ 拆装、清理方便快捷。

Main features

- ▲ Able to work with all granulators.
- ▲ Fully automatic material transfer, no Laborer required.
- ▲ Stainless steel contruction to assure material purity.
- ▲ Dust-collecting devices adopted, absorbing dust, preventing air pollution.
- ▲ Simple disassemblying cleaning.

低噪音强力破碎机
Low noise STRONG GRANULATORS



结构简图
STRUCTURE DIAGRAM



储料桶规格 / Material storage tank capacity

容量 Volume	ΦA	H	h
100Kg	Φ650mm	2700mm	600mm

技术参数 / SPECIFICATIONS

型号 Model	RF-2HP	RF-3HP	RF-4HP	RF-5HP	RF-7.5HP	RF-10HP
马达 Motor power	1.5KW/2HP	2.2KW/3HP	3KW/4HP	4KW/5HP	5.5KW/7.5HP	7.5KW/10HP
配管直径 Spring duct diameter(mm)	Φ76	Φ100	Φ100	Φ127	Φ127	Φ150
输送高度 Lift(m)	3	3	4	5	5	5
储料桶容量 Cyclone volume(Kg)	100					
适配破碎机型 Proper granulators model(HP)	5 - 10	15 - 20	30 - 40	50 - 75	50 - 75	100

自动挤胚吹瓶机
Automatic pushing embryo blow bottle machine



参数Data / 型号Model	螺杆直径 mm	长径比 L/D	塑化能力 Kg/h	挤出功率 KW	加热功率 KW	机头数量 个	模具数量 副	开合行程 mm	最大容量 ml	模具厚度 mm	气源压力 Mpa	最大产量 万只	机器尺寸 mm	机器毛重 T（吨）
SJ50C	50	25:1	30	7.5	7	双	4	100	500	50-110	0.4	5(250ml)	2500x800x1800	1.2
SJ65C	65	25:1	50	15	11	双	4	160	1500	80-200	0.6	2.8(100ml)	3300x900x2000	2.2
SJ75C	75	25:1	50	18.5	13	双	4	160	1800	90-200	0.6	2.5	3300x900x2200	2.2

主要特点

昌达自动挤胚吹瓶机均采用国内外名牌配件(日本SMC气动元件、富士电器、欧姆龙行程开关日本或常州摆线针减速箱)，采用气动加机械锁模装置，合模力强，能耗低，模具通用性强，机器结构设计精巧简单，产量高，分头控制可一机多用，适用于生产PE、PP、Ps等中空塑料制品。机器主要配件均包用一年，本场配套有完善的售后服务，为你免除后顾之忧，创造无限效益。

▲ 注：本机可同时生产同料不同重量和容量的PVC制品为单模头双模架结构。特殊规格为客户要求订造。上述参数仅供参考，如有改变恕不另行通知。

Main features

Automatic pushing embryo blow bottle machine all adopt famous brand accessory home and abroad (Japanese SMC pneumatic unit, Fuji appliance, Ohmlon limit switch, Japanese or Changzhou cycloidal pinwheel reduction box),use pneumatic and mold locked device which have the merits of strength molds gathered, low consumption, mold versatile, simple machine structure, high output, multi-purpose with control separately, can used for producing hollow plastic products such as PE, PP, PS etc. The guarantee time is one year for main accessory and has perfect after sale service so it avoids your worry in working and create good efficiency.

▲ Note:This machine may at the same time produce with the material different weight and the capacity PVC product for a single die head double model structure. Special specification for customer request making to order. The above parameter only supplies the reference, like has the change not separate to inform even slightly.

昌达机械
CHANGDA MACHINE
Http://www.zjcd.com

废塑回收拉条造粒子母机组
Master and secondary pelletizing machine Group for recycling waste plastics

主要配置 / Main Allocation

硬齿面专用减速器，38CrMoALA氮化料筒螺杆，智能温控仪，专用料筒保温罩（可节电30%），液压或电动不停机换网器，可移动式冷却水槽，吸水风机，滚刀式切粒机，可选装烘干料斗及自动上料装置。

Special speed reducer for hard surface,38CrMoAIA nitridation barrel screws, intelligent temperature controllers, special barrel covers(saving electricity up to 30%), hydraulic pressure or no-stop screen-changer, movable wash tank, blower, rotary knife pellet cutter, can be installed with drying hopper and automatic loading material device.



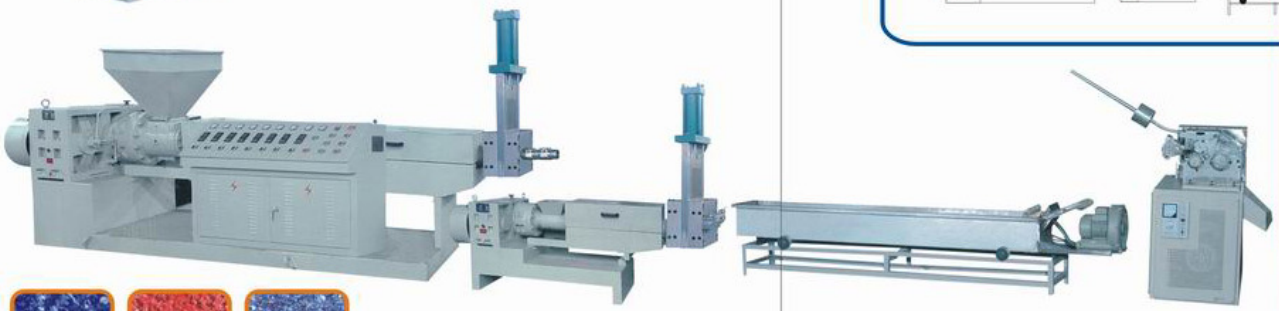

原料 Raw material

技术参数 / SPECIFICATIONS

机型Model	母机master			子机secondary			产量 (Kg/h) Output
	螺杆直径 (mm) Screw diameter	长径比 L/D ratio	电动机功率(Kw) Power of motor	螺杆直径 (mm) Screw diameter	长径比 L/D ratio	电动机功率(Kw) Power of motor	
SJZ90-80	Φ90	1：22/1：25	22	Φ80	1：10/1：8	7.5	120
SJZ120-90	Φ120	1：22/1：25	45	Φ110	1：10/1：8	18.5	180
SJZ140-120	Φ140	1：22/1：25	45	Φ130	1：10/1：8	15	280
SJZ160-140	Φ160	1：22/1：25	75	Φ150	1：10/1：8	18.5	400

主要特点 / Main feature

子母机有二次过滤，排气效果好，所生产出的粒子密实、色泽光亮，塑化效果好。

The master and secondary machines filter the materials twice to ensure high-quality grains and better exhaust and good plasticization.



应用范围 / Applications

据不同的螺杆设计及机械配置，可适用于PP、PE、PS、PET ABS、PC、亚克力等片料或颗粒料造粒。

With special design and mechanical allocation for different screw, this production line used for pelletizing in flakes or granules such as PP、PE、PS、PET、ABS、PC etc.

成品 Finished product

昌达机械
CHANGDA MACHINE
Http://www.zjcd.com

油压式切胶机
HYDRAULIC CUTTER

主要特点

- ▲ 适用于大型塑胶产品、大型管材、板材、胶头等材料的裁断再生利用。
- ▲ 本系列产品全钢板焊接，构造坚固，设计合理，占地面积小。
- ▲ 液压系统控制，操作简易、安全，剪切力小，生产效率高。

Main features:

- ▲ Used to cut plastic material of large size.
- ▲ Well constructed,small footprint.
- ▲ Hydraulic controlled, easy and safe to operate, Powerful with high efficiency.



结构原理图
STRUCTURE PRINCIPLE DIAGRAM



型号/Model	功率 Power (HP)	切刀行程a Cut limit (cm)	切刀宽度b Cut width (cm)	最大裁切力 Max press (Kgf)	外形尺寸 Out line demension (mm)	整机重量 Machine weight (Kg)
WY-5	5	50	60	15000	178x70x195	1000
WY-7	7.5	70	80	20000	210x90x242	1400

Y82系列液压打包机
Y82 Series Hydraulic Packing Machine

主要特点：

- ▲ 所有油缸采用进口密封圈，质量可靠，延长使用寿命。
- ▲ 液压驱动，采用上置式油缸，无需地下基础
- ▲ 打包机压力从15吨至200吨不等，规格齐全。

用途说明：

该系列机型广泛用于废塑料软包装、纱、布、羊毛、毛球等松散物的压缩打包，包块外形尺寸统一、整齐、比重大、密度高，适合于出口产品装运集箱的需要，另外也适用于废纸、麦杆、金属容器等的压缩，使其体积成倍缩小，降低运输成本，便于搬运加工。



Main Features:

- ▲ Adopt the imported seal ring for oil cylinder, good quality, durable in use.
- ▲ Driven by hydraulic pressure, use upper oil cylinder, no need for underground base.
- ▲ With variety specification from 15T to 200T in baling pressure.

Application:

This series packing machine used for loose compressed packing such as waste plastic soft package, yarn, waste cloth, waste wool, wool balled and so on. The bale has the merits of unique outline size, high density, suitable for containerized transportation, in addition, this series are also applicable for the compression such as waste paper, straw, metal cans&tins, which reduce in volume largely, lower in transport cost, easy to convey and process.

参数/Data 型号/Model	料箱尺寸 Plastic box demension (mm)	包重 Bale Weight (Kg)	配套动力 Driving power (Kw)	外形尺寸 Out line demension (mm)	备注 Remrks
Y82-40	1000x700x1500	100-150	7.5	1500x850x3300	手动阀操作 The manual valve operation
Y82-50	1050x750x1600	150-200	7.5	1600x900x3500	手动阀操作 The manual valve operation
Y82-60	1100x750x1600	180-220	11	1650x900x3600	手动阀操作 The manual valve operation
Y82-80	1150x800x1800	250-300	15	1800x950x4000	手动阀控制 自动出包 A manual valve of automatic operation package

▲ 开包机 / Bale opener

电机（Motors）：2×3kw 1×7.5kw
长（Lenth）：3400mm
宽（Width）：1700mm
高（High）：2500mm
重量（Weight）：2500kg

▲ 剥纸机 / Label Stripper

产量(Capaoity)：2.5t/h
主机功率(Power)：22kw
电机(MotorsHigh)
pressure water pump: 7.5kw
用水量(Circulation water)：20m³/h
尺寸(Size)：3900mmx2000mmx3000mm

能够去除掉标签，沙子，金属，泥土等。是一个非常高效率的机器。

This machine can wash away the label, sands, metal, mud etc. It is a very high efficient machine.

▲ 输送带/Bottle Conveyor

长（Length）: 4–8m
功率（Power）：1.5kw motor
输送瓶子到粉碎机
Convey bottle to the next

▲ 脱水机 / Auto-dewatering Machine

电机(Motors)：11kw
转速(Rotational speed)：960rpm
脱水效果(Dehydrated effect)：92%以上

▲ 上料绞龙/Screw Conveyor

尺寸（Size）: ф400×4505
功率（Power）：3kw, 3# seat, CS plate
输送瓶片去下一台机器
Convey bottle flakes to next machine

自动瓶片（PET）清洗设备流水线示意图
Auto-Flake(PET) Washing Crusher Flowing Line Sketch

蒸汽双锅自动瓶片设备流水线示意图（班产10吨-20吨）
Steam Twin Boiler Auto-Flake Machine Flowing Line Sketch
(Output of 10T–20T per shift.)

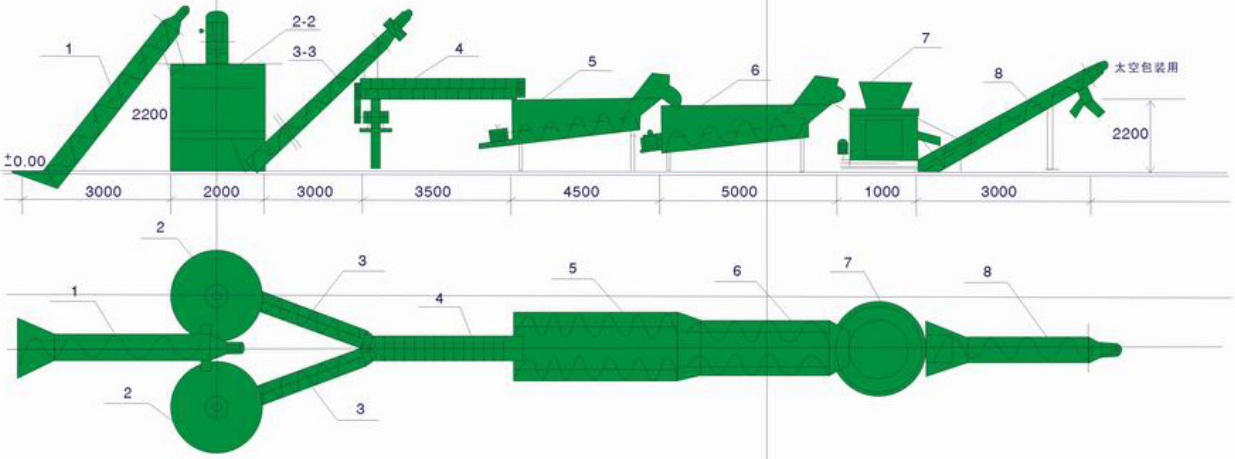

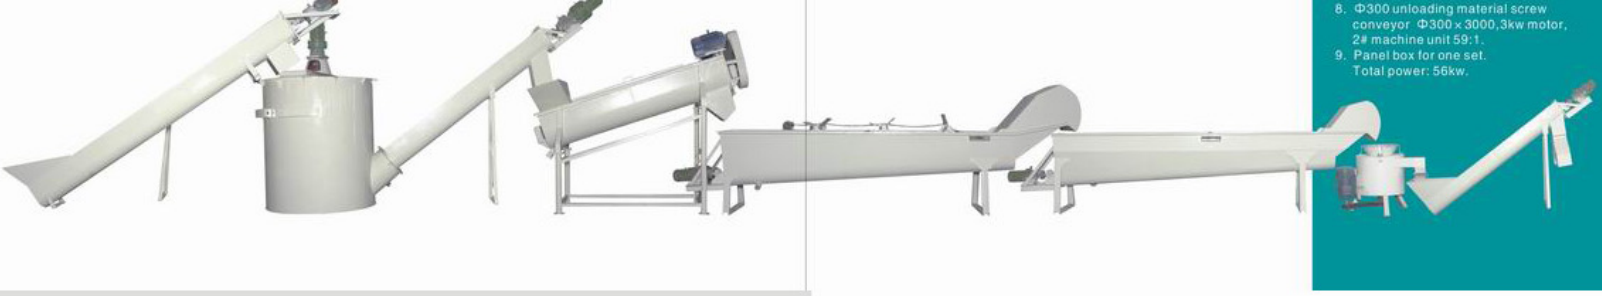

配置说明

1、 上料龙Φ400×4500
  2#变速器 59：1
  3KW电机壹台
2-2、蒸汽加热锅Φ2000×2200
  4#立式变速器
  7.5KW电机贰台 59：1
3-3、出料龙Φ400×4500
  3#变速器 59：1
  4KW调速电机贰台
4、 打料机Φ500×4000
  7.5KW电机壹台
5.6、双水漂龙Φ400×5000
  2#变速器
  3KW电机 59：1
  双机贰台
7、 Φ600自动脱水机
  7.5KW电机
8、 Φ300装袋龙 Φ300×3000,
  3KW电机
  2#机组59：1
9、配电箱一门 总功率56KW

Allocation Instruction:

1. Screw conveyor Φ400×4500
  2# speed change ratio: 59:1
  3kw motor one set.
2.–2 Steam heating boiler Φ2000×2200
  4# vertical speed change ratio: 59:1
  7.5kw motor one set 59:1
3.–3 screw conveyor Φ400×4500
  3# speed change ratio: 59:1
  4kw speed adjust motor two sets.
4. Grating barrel Φ500×4000
  7.5kw motor one set
5.6. twin screw wash tank Φ400×5000
  2# speed change motor
  3kw motor 59:1
  two set.
7. Φ600 Auto-dewatering machine
  7.5kw motor
8. Φ300 unloading material screw conveyor Φ300×3000,3kw motor,
  2# machine unit 59:1.
9. Panel box for one set.
  Total power: 56kw.

CHANGDA

MACHINE

昌达机械 值得信赖

台州市昌达机械厂
TAIZHOU CITY CHANGDA MACHINE FACTORY

地址:中国浙江省台州市椒江区洪西路工业园区52-7号 邮编:318015
ADD: No.52-7, Hongxi Road Industrial Zone, Jiaojiang District,
Taizhou City, Zhejiang Province, China P.C: 318015
电话/Tel:+86-576-88013498 88673733
传真/Fax:+86-576-88010078
手机/M.B:+86-13905768561
Http://zjchangda.cn.alibaba.com
Http://www.zjcd.com
E-mail:info@zjcd.com sale@zjcd.com

昌达机械
CHANGDA MACHINE

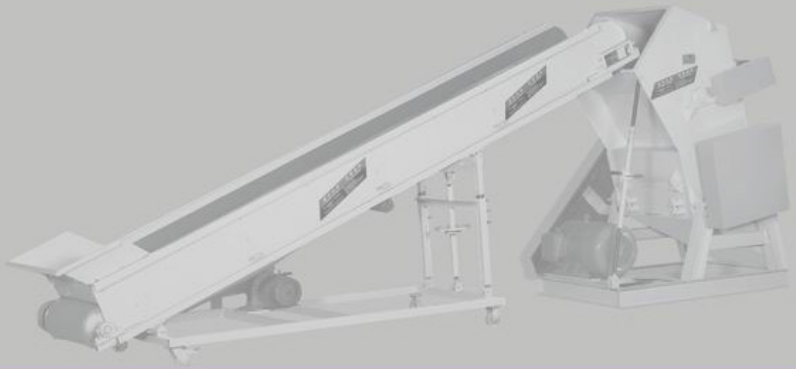

台州市昌达机械厂
TAIZHOU CITY CHANGDA MACHINE FACTORY